Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

TERMINAL BLOCKS (H Type)

(With 1.2 mm raised base)

Jameco Part Number ☐
215010

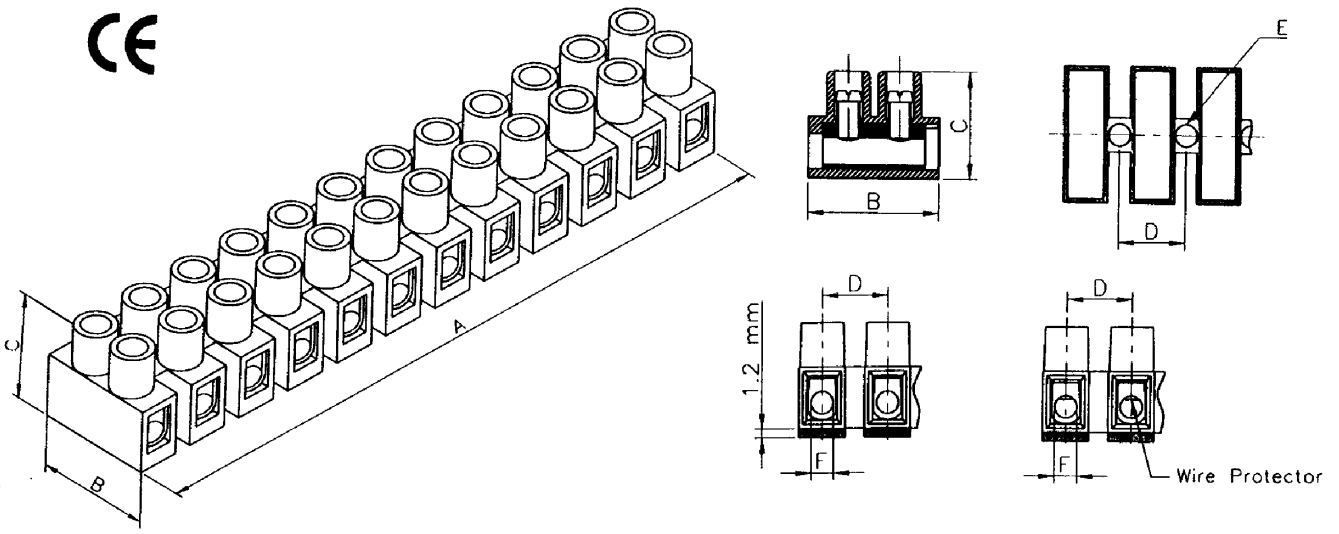

Dimensions & Data :

Model	Cat. No.	mm²	Amp	Volt.	Screw	Dimensions (mm/in.)							Packing
						Unit	A	B	C	D	E	F	
PA8	PA8H	1.5	17.5A	450V	M2.6×5	(mm)	96.20	17.00	14.50	8.00	2.90	2.8±0.1	50 Pcs/Bag.
						(in)	3.787	0.669	0.570	0.315	0.114	0.110	500 Pcs/Carton
PA8 DS	PA8HDS	1.5	17.5A	450V	M2.6×5	(mm)	96.20	17.00	14.50	8.00	2.90	2.8±0.1	50 Pcs/Bag.
						(in)	3.787	0.669	0.570	0.315	0.114	0.110	500 Pcs/Carton
PA10	PA10H	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	17.00	10.00	3.60	3.4±0.1	50 Pcs/Bag.
						(in)	4.626	0.795	0.670	0.394	0.142	0.134	500 Pcs/Carton
PA10 DS	PA10HDS	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	17.00	10.00	3.60	3.4±0.1	50 Pcs/Bag.
						(in)	4.626	0.795	0.670	0.394	0.142	0.134	500 Pcs/Carton

Description :

*Base : With 1.2mm raised base.
*Material : Polyamide 66 (Nylon 66), UL 94V2, Natural.
*Working Temperature : 110℃.
* Number of Poles : 12 poles.
* Terminal Insert : Brass metal alloy, nickel plated.
* Wire Protector (DS) : Stainless spring steel.
* Screws : Zinc plated, yellow chromed.
* Stripping Length : PA8 - 5.3mm (0.21 in)
PA10 - 7.3mm (0.29 in)

International Approvals :

Model	Germany	U.S.A.	Sweden	Canada	Denmark	Norway	Finland	Holland	Austria	Belgium	Switzerland
PA8	450V/17.5A	600V/20A	450V	400V/10A	400V	400V	400V	400V	400V	400V	400V
PA8 DS	1.5 mm²	12-22AWG	1.5 mm²	18-20AWG	1.5 mm²	1.5 mm²	1.5 mm²	1.5 mm²	1.5 mm²	1.5 mm²	1.5 mm²
PA10	450V/24A	600V/30A	450V	400V/20A	400V	400V	400V	400V	400V	400V	400V
PA10 DS	2.5 mm²	10-22AWG	2.5 mm²	14-18AWG	2.5 mm²	2.5 mm²	2.5 mm²	2.5 mm²	2.5 mm²	2.5 mm²	2.5 mm²